


DRIVE ROLL BC

Drive roll|

dimensioni | dimensions

	UM	Valore Value
A	mm	116
B	mm	153÷174
C	mm	85÷106
D	mm	68

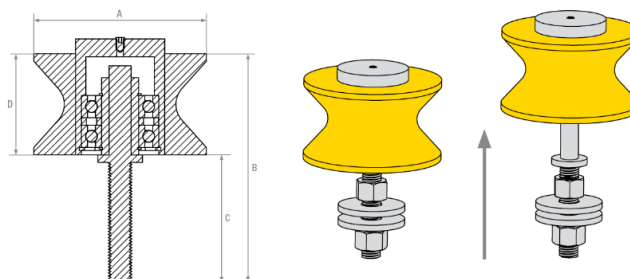

specifiche mescola | compound specifications

	um	norme norms	valore value
polimero base base polymer			PU
peso specifico specific weight	g/cm ³	ISO 2781	1,13
durezza hardness	SH/A	ISO 7619-1	95
carico di rottura tensile strength	N/mm ²	ISO 37-1	44
allungamento a rottura elongation at break	%	ISO 37-1	350
resistenza alla lacerazione tear resistance	N/mm	ISO 34-1 - Metodo B	53
modulo al 100% elongation modulus at 100%	N/mm ²		12,5
modulo al 300% elongation modulus at 300%	N/mm ²		30,9
perdita abrasione abrasion loss	mm ³	ISO 4649	65
composta da Made of			PU95T